


Installation size:





Unit: mm

2.4GHz Wireless Camera with Color LCD Monitor

USER MANUAL



Bracket installation:

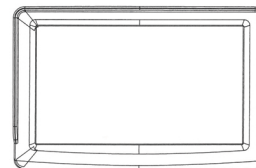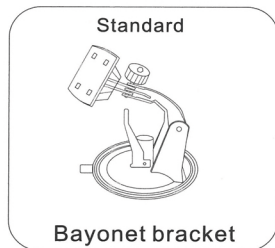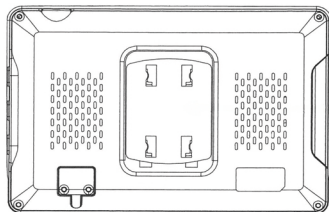

Before operating the Monitor, please read this manual thoroughly and retain it for future reference.

Product Description:

2.4G Wireless Car Monitor Specification:

Monitor: 4.3&5 inch digital panel

Resolution: 480xRGBx272

Screen Type: 16:9

Backlight: LED, 400cd/m2

Contrast: 700:1

Viewing angle:Hor. L(70) R(70) Ver. UP(50) DOWN(70)

Operation Language: English ,Chinese,NEDE, PYCC,
Italian, ESPA, DEUT,French,PORT

AV input:1 channel 2.4G wireless video signal input

2.4G transmission distance:100M in open area

2.4G frequency point: 2370 ~ 2510MHzMHZ

Receiving Sensitivity: -85dBm

Power supply:DC12-24V

Power consumption:<5W

Shockproof level:4G

Working temperature:-20 to 70 degree

Storage temperature:-30 to 80 degree

Size:4.3"(115mm*78mm*38MM) 5"(132mm*88mm*38mm)

Bracket: suction bracket

Wireless Camera Specification:

Car:bus,truck,trailer

Image sensor:1/4" CMOS

Resolution:600TV Lines

Light Sensor, 5pcs LED Turn on Automatically in Darkness
with parking guide line

Normal Image/ Mirror Image Adjustable

2.4G transmission distance:100M in open area

Waterproof:IP68

Lens Angle:120 Wide Angle

Emission power: 24DBm

2.4G transmission distance:100M in open area

2.4G frequency point: 2370 ~ 2510MHzMHZ

Power supply:DC12-24V

Power consumption:<3W


Working temperature:-20 to 70 degree

Storage temperature:-30 to 80 degree


Size:65mm*58mm*43mm(EU and Global market)

:210mm*43mm*43mm(USA type bracket)

Connection Diagram:

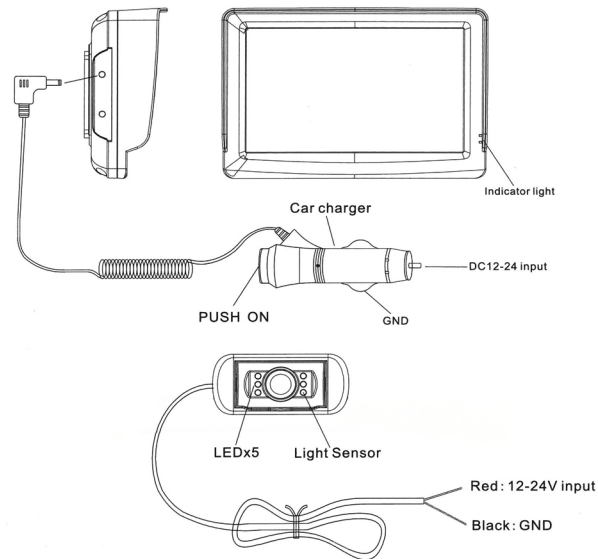

Functional operation:

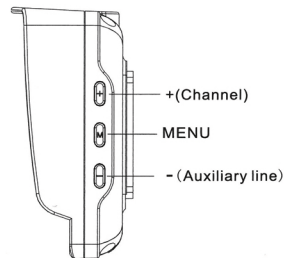

MENU:

- 1.Beightness
- 2.Contrast
- 3.Color
- 4.Mode:16:9/4:3
- 5.Language: English...
- 6.Reset

Optional function:

- 1.Channel(2370 2390 2510)Optional
- 2.Moving grid lines on/off, H V W Adjustable
- 3.Default camera With auxiliary line Not adjustable