

# CT23FT21 Double/Single DIN Fitting Kit for Fiat Vehicles



### IN THE KIT

- Double DIN Fascia Panel
  Radio Brackets
- 4x Torx Screws • 4x Washers
- 4x Phillips Screws
- 2x Fascia Clips

### APPLICATION

Note: Application data is subject to change at any time

Fiat Ducato (X290)

2014 - 2021

Note: for use with facelift models only.

### FEATURES

- Allows for the installation of a double/single DIN aftermarket stereo
- Includes mounting brackets and accessories
- Finished in black to match vehicle dashboard

#### DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.

## PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. **Connects2 can not be held responsible for the installation of this product**.

### **INSTALLATION GUIDE**



Basic (Mini ISO) Head Unit


Uconnect (Mopar) Head Unit

Please note: this fascia is intended for vehicles with the a standard gloss black fascia/radio set-up. Please ensure that you have the correct product & tools before starting any installation.

#### DASH DISASSEMBLY



Use a set of release keys to pry the head unit out of the dashboard. Dependent on the style of unit you have installed, you will need either single or double DIN keys. Once released, take out the unit and disconnect all the wiring.

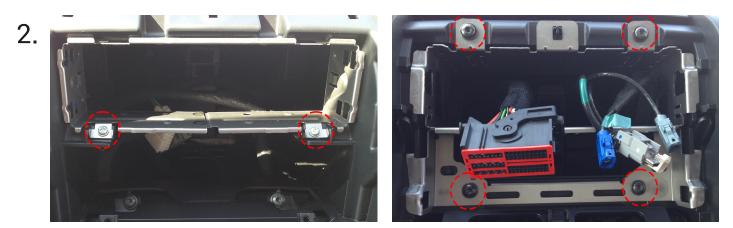


Once the main head unit is out of the way, proceed to remove the highlighted screws. When done, proceed to fully remove the cage.

### **INSTALLATION GUIDE**

#### DASH MODIFICATION

3.

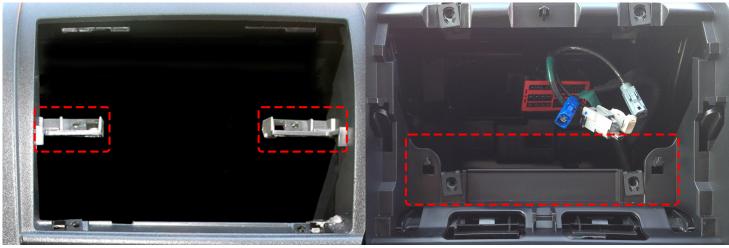

Basic (Mini ISO) Head Unit

Uconnect (Mopar) Head Unit

The highlighted area(s) on the relevant platform will need to be cut out of the dashboard in order to allow the new double DIN unit to sit correctly. Note: if a single DIN unit is being installed into a vehicle with a "basic" head unit, then the vehicle does NOT need to be modified. The "Uconnect" platform will need to be modified regardless.

When performing any modification to the vehicle, always ensure to measure where the stereo will sit and take due care when performing cuts to the vehicle. Connects2 always promotes the use and expertise of professional installers. Connects2 will not be held responsible for any damage to the vehicle.

#### FASCIA ASSEMBLY





Using the 4x phillips screws, take the brackets and line them up to the following posts on the rear of the new fascia panel and proceed to attach them to the relevant side.

5.



Once the brackets are fixed to the fascia, take the new stereo and slide it in the back toward the opening. Lining the stereo up correctly, use the screws/washers within the kit to attach it according to the correct depth.

# INSTALLATION GUIDE

#### KIT ASSEMBLY





Once the kit has been assembled and the wiring for the stereo is completed, simply use the clips within the kit on the reverse of the fascia and proceed to clip it into place.