


EZUp Instruction kit

ISUZU EZUp Hoodlift

HL0400


1

OPEN HOOD OF VEHICLE USING ROD TO KEEP HOOD OPEN WHILST YOU WORK

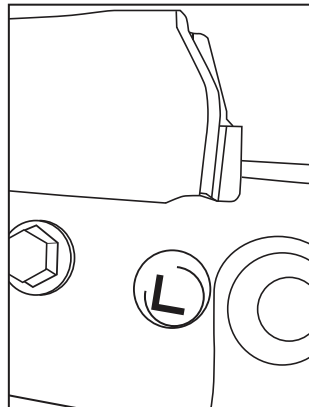

Left and Right hand side of the vehicle is stamped inside Bonnet/Hood


2

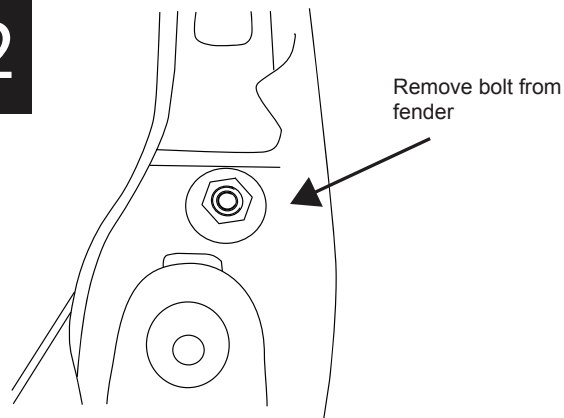

Remove bolt from fender


3

- 1) Remove the supplied bolt and washer from bracket.
- 2) Fit bracket over existing hole, with the ball stud facing the engine, by replacing existing bolt in existing hole. Do not tighten too much.
- 3) Fit supplied bolt through the existing hole and the bracket.
- 4) Tighten both bolts.
- 5) Repeat on Right hand side.

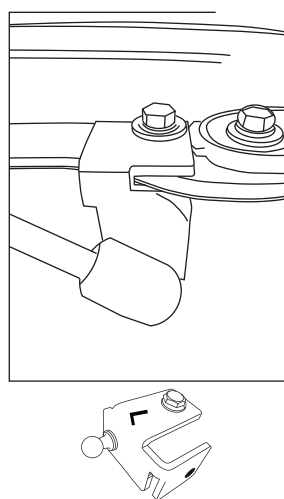


4

LHS HOOD

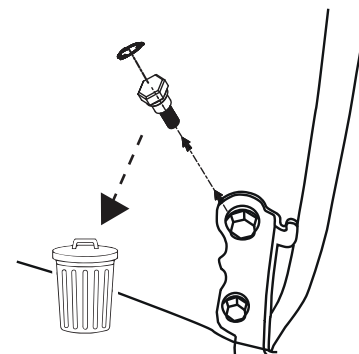

On the hood remove the LHS top bolt and leave the bottom bolt in place.

5

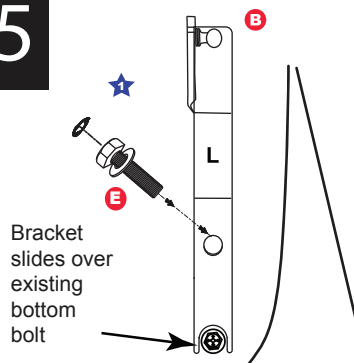


Place LHS bonnet bracket onto bonnet and replace with bolt supplied

Bracket slides over existing bottom bolt

LEFT HAND SIDE BONNET

6



Fit the LHS top bracket, and replace the LHS bolt. Ensure that the ball is facing out of the vehicle.


Fit the Lift-O-Mat to the hood/bonnet first with the piston rod facing down.

7

Click top Ball Socket onto Ball Stud on Bracket

LEFT HAND SIDE BONNET AND FENDER

Attach ball socket at piston end side to the ball stud in bonnet/hoodlift fender

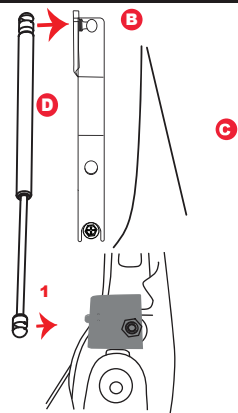

8

Repeat steps 4 - 7 for RHS

NB: After installation open Hood/Bonnet gently to ensure that there is no interference with any hardware.

FITTING KIT CODE	MANUFACTURER	MODEL TYPE	YEAR	PRODUCT	REVISION	LABOUR TIME	DATE	PAGE
HL0400	ISUZU	D-Max	2008 TO CURRENT	EZUp	1	30min	01/09/2017	1
TORQUE-N.m	★ 25N.m ± 2N.m							

IMPORTANT:

No liability will be incurred by Industrial Specialised Applications company, for injury, death, or property damage caused by a product which has been set up, operated, and/or installed contrary to EZUp installation guide/manual, or which has been subjected to misuse, negligence, or accident, or which has been repaired or altered by anyone other than Industrial Specialised Applications, or which has been used in a manner or for a purpose for which the product was not designed.