


## UNIVERSAL APPLICATION

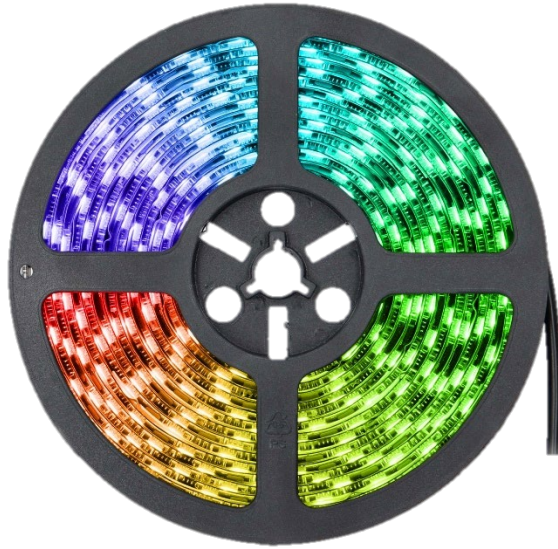

Visit [HEISELED.COM](http://HEISELED.COM) to view the available installation parts and accessories.

### KIT FEATURES

- 5 meter reel of chase LED strip lights
- Chase RGB controller included
- RF remote included
- IP65 rated strip light
- 1-year limited warranty

### Tools needed

- Alcohol wipes
- Digital multimeter
- Soldering iron
- Solder
- Wire strippers
- Electrical tape
- Tape measure

### Having difficulties?

Contact our tech support line at:  
[Techsupport@metra-autosound.com](mailto:Techsupport@metra-autosound.com)

Or via phone at:  
**368.257.1187**



### TECH SUPPORT HOURS (EST)

Monday-Friday: 9:00AM – 7:00PM  
Saturday: 10:00AM – 7:00PM  
Sunday: 10:00AM – 4:00PM

Closed for most US Federal Holidays

### Installation instructions

1. Measure the length of desired mounting location for LED strip.
2. Roll out a LED strip to the same length. Cut the LED strip across the nearest cut line.
3. Count and record the number of strip segments that are on the cut LED strip.
4. Clean the mounting location with an alcohol wipe and let full dry.
5. Remove the protective backing from the LED strip, then press the strip into place. Apply pressure for 30 seconds.
6. Mount controller and connect red wire to switched +12V, and black wire to chassis ground.
7. Connect strip to controller.
8. Download app and set chase pixel count to the number recorded in step 3.
9. Test functionality with remote and app.

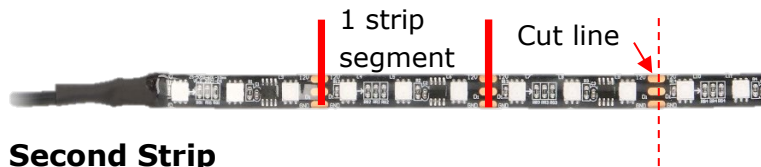

### Second Strip

The remaining strip can be used by soldering a RGB-PT1 (not included) to the 3 contact pads. Make sure to solder to the start of the strip. The strip direction is indicated by the arrow printed on the strip. Connect the **red wire** to the 12V pad, **black wire** to the GND pad, and **blue wire** to the D1 pad. The green wire from the RGB-PT1 is not used.

