




...connecting to the aftermarket

CTSPO005.2

Porsche Steering Wheel Control Interface

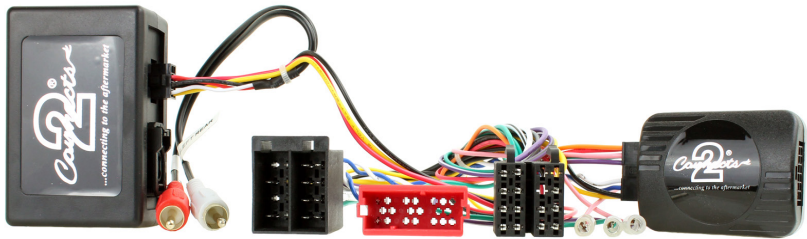

Vehicle Application

Porsche 911 (997) 2004 - 2008
Porsche Boxster (987) 2004 - 2008
Porsche Cayman (987c) 2005 - 2009

Key Features

- Retains Steering Wheel Controls (if equipped)
 - Retains OEM Phone Buttons (if equipped)
- Retains OEM MOST 25 Fibre Optic Amplifier (if equipped)
- Provides Park Brake, Speed Pulse, Reverse Gear and Antenna Remote Feeds

www.connects2.com

Designed and
Engineered
in the UK. 

The information provided in this document is subject to change without notice due to changes and/or improvements to the product/s.

ABOUT THIS PRODUCT

CTSP005.2

CAN-Bus Steering Wheel Control Interface for Porsche vehicles with 36 Way Mini ISO connector, Retains OEM Fibre Amplifier.

NB: Aftermarket stereo must have RCA audio out connectors

WIRING COLOUR CODES

Purple	Right Rear Speaker +	Yellow	Permanent 12V
Purple/Black	Right Rear Speaker -	Black	Ground
Green	Left Rear Speaker +	Red	Ignition 12V
Green/Black	Left Rear Speaker -	Orange	Illumination
Grey	Right Front Speaker +	Pink	Speed Pulse
Grey/Black	Right Front Speaker -	Green	Park Brake
White	Left Front Speaker +	Purple/White	Reverse
White/Black	Left Front Speaker -	Blue	Antenna Remote

PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are using during the installation to avoid damage to the vehicle or product. **Connects2 can not be held responsible for the installation of this product.**

TECHNICAL SUPPORT

Connects2 Ltd. want to provide a fast and suitable resolution to any problems encountered during installation of this product. To get in touch with our dedicated technical support team, please fill in a ticket at support.connects2.com and provide as much information as possible.

FOLLOW US ON SOCIAL MEDIA

for all the latest updates



/CONNECTS2
Watch us on
YouTube



/CONNECTS2
Like us on
facebook



CONNECTS2LTD
Follow us on
instagram



@CONNECTS2
Follow us on
twitter




CONNECTS2LTD
Follow us on
linkedin



CONNECTS2BLOG.COM
Follow our blog on
wordpress

FITTING GUIDE

1. Remove and disconnect the original head unit.
2. Connect the 12 way molex connector of the head unit patch lead (supplied separately) to the interface.



3. Connect the opposite end of head unit patch lead to the head unit steering wheel control input on the back of the aftermarket head unit.

NB: This may be a 3.5mm jack plug or a wire input depending upon the head unit brand being fitted. Please see the head unit installation manual for further information on where to connect.

Important: This step must be completed before connecting power to the interface. Failure to so do may result in no steering wheel control function.



4. Connect the 14 way molex connector to the interface



5. Connect the male power/speaker ISO harness to the female power/speaker ISO harness from the aftermarket head unit. For aftermarket head units without an ISO connector, please refer to "Wiring Colour Codes" on Pg. 2.



FITTING GUIDE

6. Connect the Amplifier retention interface to the main wiring harness, and plug in the Fibre amplifier connector from the vehicle. (NB: Remove interface dust cover before making this connection)

7. Connect the female vehicle specific connectors on the harness to the male vehicle connector from the vehicle. Test head unit for correct operation.

STEERING WHEEL CONTROL FUNCTIONALITY



- 1** Volume Up
Volume Down
Mute - Push Button (if available)
- 2** Source
- 3** Pick up



- 1** Track Up
Track Down
Band - Push Button (if available)
- 2** No function
- 3** Hang up